

SCEP Server

Version:
v3.2.1

Date:
11.06.2026



Contents

1	Introduction	3
1.1	System requirements	3
1.2	Copyright info	3
1.3	Trademark	3
1.4	Contact information	4
2	Changelog	5
3	Login	6
4	Interface overview	7
4.1	Branding	7
4.2	General	7
4.3	List view	9
4.4	Forms	14
4.5	Dialogs	15
5	Using SCEP Server	16
5.1	CA's	16
5.2	Certificates	16
5.3	CRL's	17
5.4	Logs	17
5.5	Users	17
5.6	SCEP authentication	18
6	Maintenance	19
6.1	Jobs	19
6.2	Logs	19
6.3	Maintenance schedules	20
6.4	Upload backup	20
6.5	Create backup job	20
6.6	Restore backup job	20
6.7	Create backup for update job	20
6.8	Maintenance mode	20
7	Settings	21
7.1	General	21
7.2	Logs	21
7.3	Two-factor authentication	21
7.4	Single Sign-on (SSO)	21
7.5	REST API documentation	23
8	REST API Documentation	24
9	Open source clearance	25
9.1	List actions	25
9.2	Row actions	25
10	Status and license	26
10.1	Requesting license	27
10.2	License expiration	27

1 Introduction

This document intends to provide information and instruction on using the SCEP Server system. Includes information about the product's features and how some of the features are designed to work. The document also provides system requirements and copyright info.

1.1 System requirements

The system is designed to be used by a web browser. In order to ensure the proper functioning of the system, the web browser should support the following standards:

1. HTML 5
2. CSS 3
3. JavaScript support

The application is designed especially for the following web browsers:

1. Edge version 114 and compatible
2. Firefox version 115 and compatible
3. Google Chrome version 114 and compatible
4. Opera version 100 and compatible
5. Safari version 16.5 and compatible

1.2 Copyright info

The copyrights for certain portions of the Software may be owned or licensed by other third parties ("Third Party Software") and used and distributed under license. The Third Party Notices includes the acknowledgements, notices and licenses for the Third Party Software. The Third Party Software is licensed according to the applicable Third Party Software license notwithstanding anything to the contrary in this Agreement. The Third Party Software contains copyrighted software that is licensed under the GPL/LGPL or other copyleft licenses. Copies of those licenses are included in the Third Party Notices. Welotec's warranty and liability for Welotec's modification to the software shown below is the same as Welotec's warranty and liability for the product this Modifications come along with. It is described in your contract with Welotec (including General Terms and Conditions) for the product. You may obtain the complete Corresponding Source code from us for a period of three years after our last shipment of the Software by sending a request letter to: Welotec GmbH, Zum Hagenbach 7, 48366 Laer, Germany Please include "Source for Welotec VPN Security Suite" and the version number of the software in the request letter. This offer is valid to anyone in receipt of this information.

1.3 Trademark

Welotec is a registered trademark of Welotec GmbH. Other trademarks mentioned in this manual are the property of their companies.

1.4 Contact information

Welotec GmbH

Zum Hagenbach 7, D-48366 Laer

Phone: +49 (0)2554/9130-00

Fax: +49 (0)2554/9130-10

Email: info@welotec.com


Website: www.welotec.com

2 Changelog


Ver- sion	Date	Log
v3.2.1	11.06.2026	Upgrade Symfony to 7.4. Update PHP to 8.5.6. Fix cleanup command not removing maintenance logs. Using s6-overlay instead of Supervisor. Using acme.sh instead of Certbot.
v3.2.0	16.04.2026	Added automatic removal of expired certificates from CRL. Added support for Elliptic Curve Cryptography (ECC) in CA.
v3.1.2	20.02.2026	Update PHP to 8.5.3.
v3.1.1	03.02.2026	Added mariadb server validation flag.
v3.1.0	19.11.2025	Added HTTPS server SSL certificates to support RSA and Elliptic Curve (EC) keys. Update default branding. Fix PHP license version information. Fix RCE vulnerability. Added possibility to enable endpoint with a custom redirect URL for Microsoft Entra ID using OpenID Connect (Single Sign-On). Add possibility to configure CORS related headers. Register login attempt when successfully logged in using Microsoft Entra ID using OpenID Connect (Single Sign-On). Add visible columns search bar. Obfuscate sensitive data on UI by default with a possibility to reveal them. Lower number of layers in docker image. Upgrade to PHP 8.4.14 and Symfony 6.4. Add audit logs.
v3.0.1	29.01.2025	Ensure that database is empty before migrating from v2.x
v3.0.0	12.07.2024	Initial contents of this document

3 Login

Before using the system you will be asked to authorize yourself. It can be done by providing Username and Password and clicking the “Log in” button.

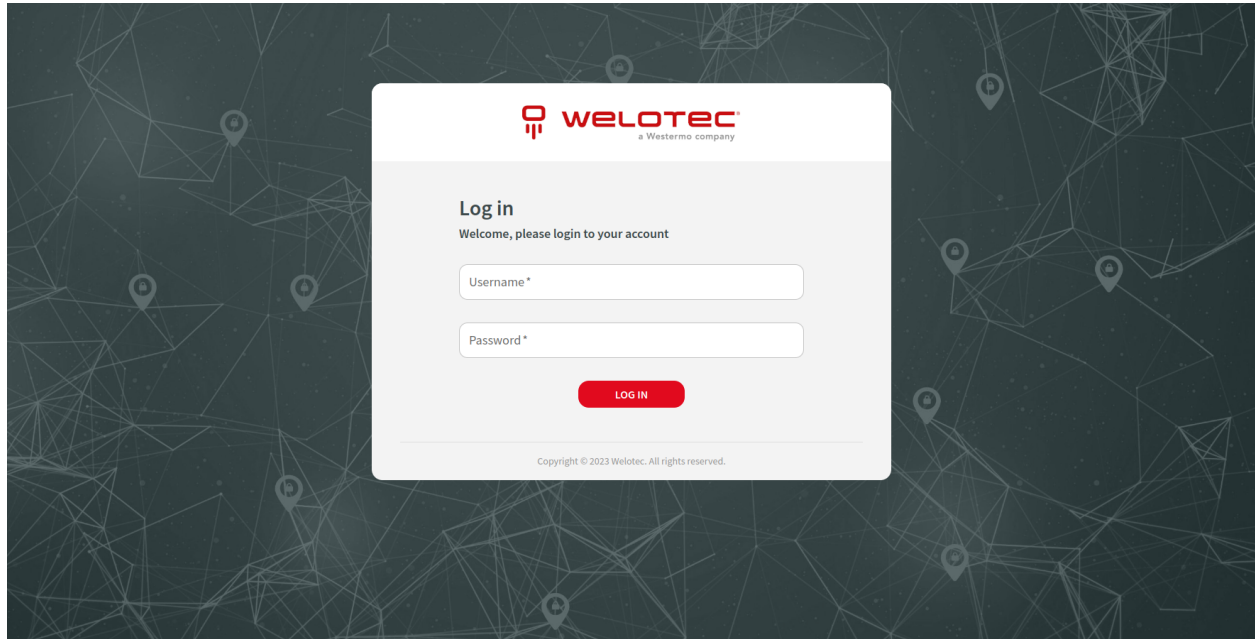

The screenshot shows a login form centered on a dark background with a network-like pattern. The form is white and contains the following elements:

- Welotec logo at the top:  **welotec**[®] a Westermo company
- Section title: **Log in**
- Text: Welcome, please login to your account
- Username input field: Username *
- Password input field: Password *
- Red button: LOG IN
- Footer: Copyright © 2023 Welotec. All rights reserved.

4 Interface overview

The interface might slightly differ in appearance on different web browsers, due to different ways of rendering the structure of the page.


4.1 Branding

The system might be additionally personalized based on your branding needs, therefore screens presented in this document might differ in colour, appearance and branding from the system you are currently using. The structure and general interface of a personalized system remain intact.

4.2 General


4.2.1 Sidebar

Sidebar is located on the left and holds an expandable menu designed to navigate through the system. Sidebar can also be collapsed to have more space for content.

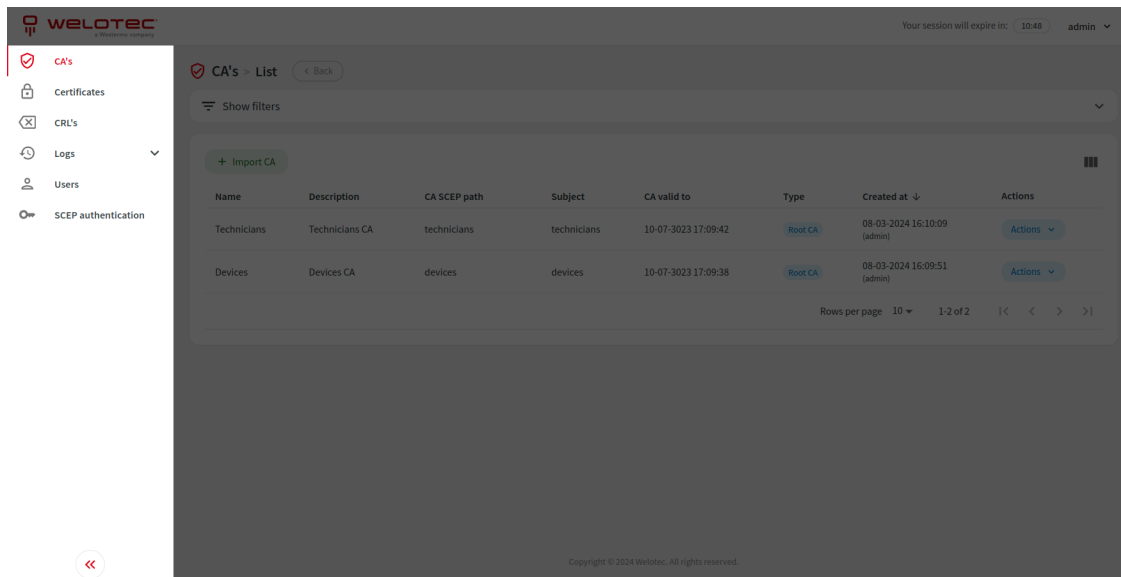


4.2.2 Navbar

Navbar is located at the top and holds information about currently logged-in user and session expiration time.

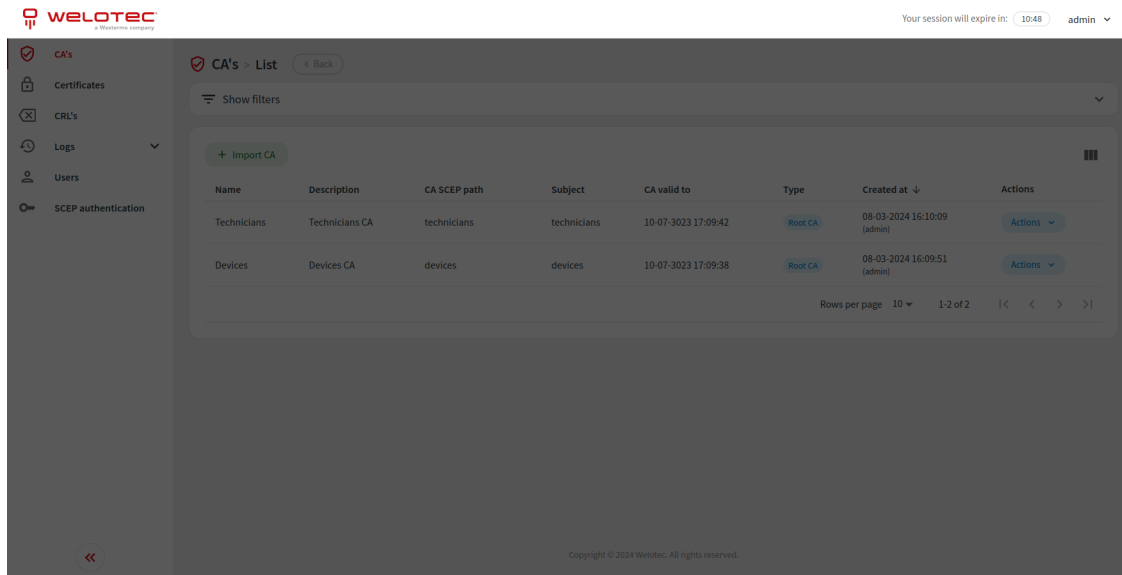


An expandable menu with additional options is available after clicking on the username.

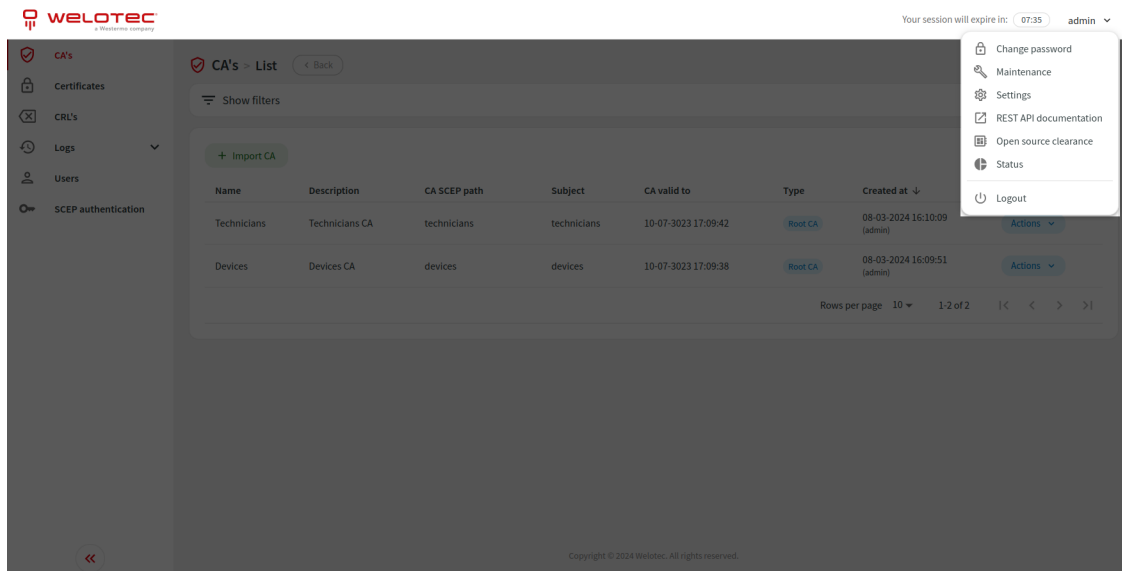


4.2.3 Content

General content is located in the middle and presents selected information.

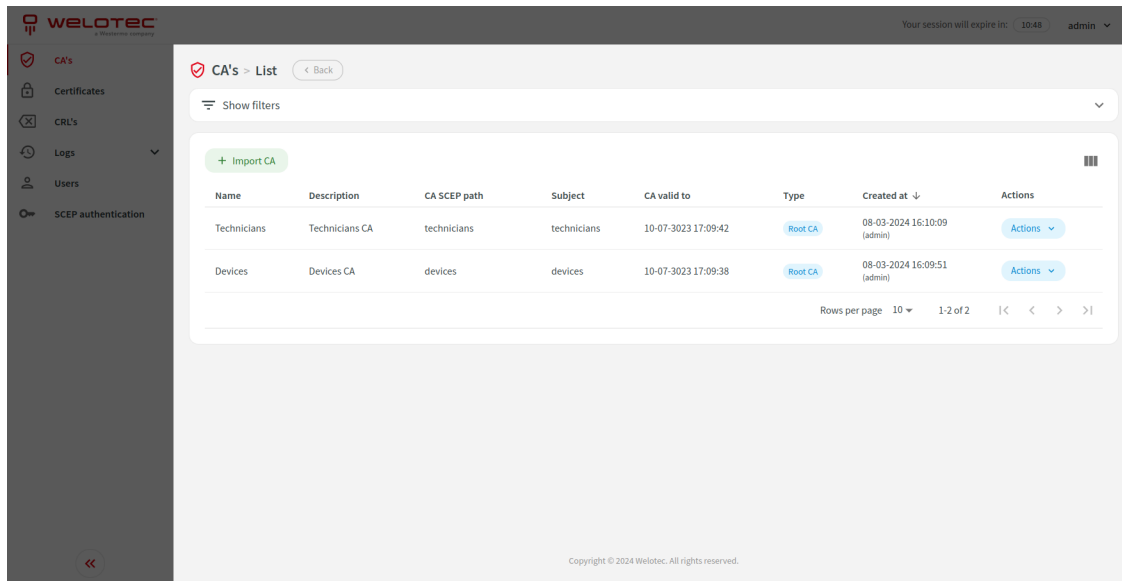


4.3 List view

Inside the content area you can often find a table with columns and rows that presents a list of selected data.

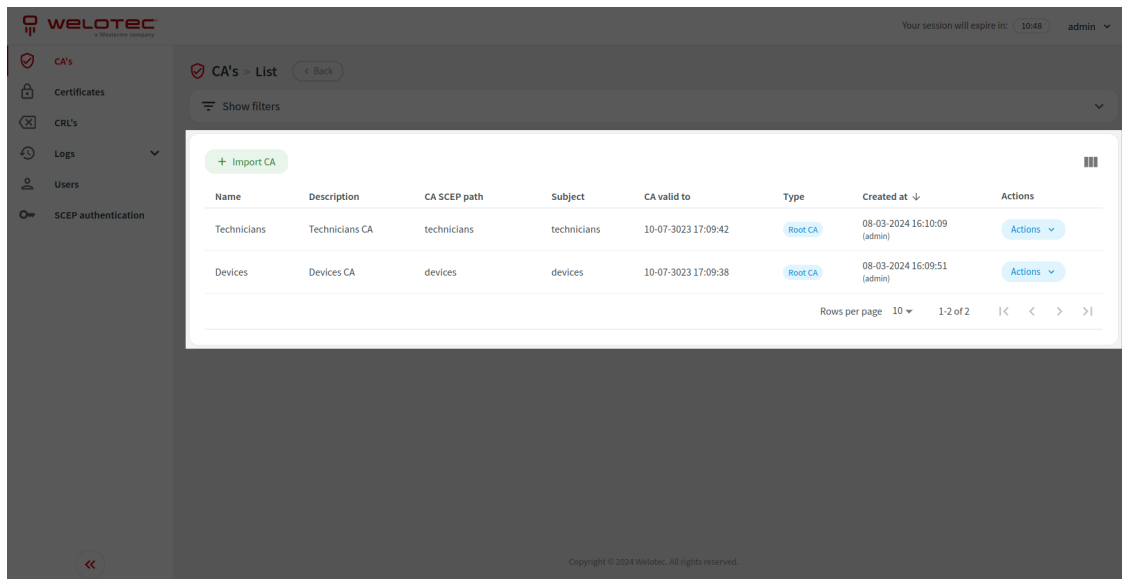

4.3.1 List actions

Most lists allow you to perform actions related to visible data i.e. create or export.

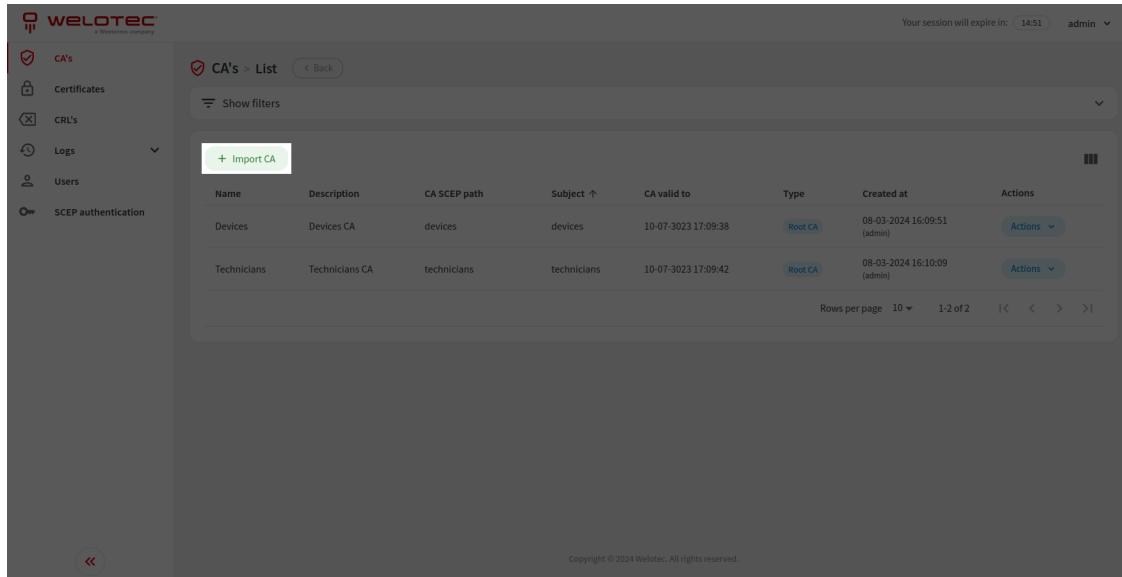


The screenshot shows the 'CA's List' page in the WELOTEC interface. A sidebar on the left contains navigation items: CA's, Certificates, CRL's, Logs, Users, and SCEP authentication. The main content area has a 'CA's List' header with a 'Back' button and a 'Show filters' dropdown. Below this is a '+ Import CA' button. A table displays two rows of CA data:

Name	Description	CA SCEP path	Subject ↑	CA valid to	Type	Created at	Actions
Devices	Devices CA	devices	devices	10-07-2023 17:09:38	Root CA	08-03-2024 16:09:51 (admin)	Actions ↓
Technicians	Technicians CA	technicians	technicians	10-07-2023 17:09:42	Root CA	08-03-2024 16:10:09 (admin)	Actions ↓

At the bottom of the table, there is a pagination control showing 'Rows per page 10', '1-2 of 2', and navigation arrows. A copyright notice 'Copyright © 2024 Welotec. All rights reserved.' is visible at the bottom of the page.

4.3.2 Row actions


In most cases you can also perform actions related to a specific row i.e. edit or delete. Some actions may be disabled, please hover over the disabled button to see a tooltip with detailed information.

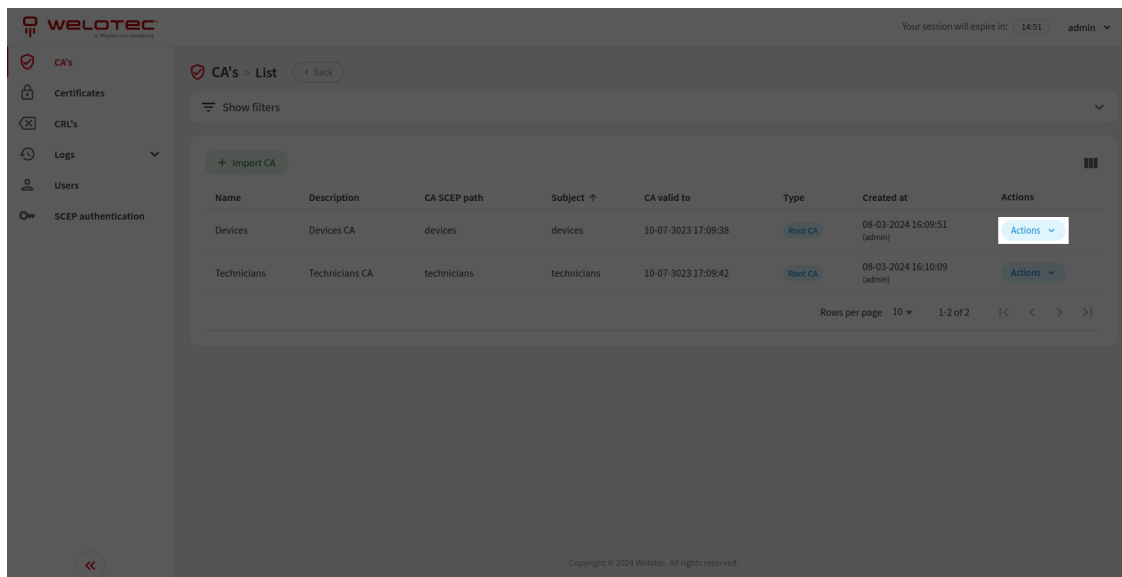


This screenshot is identical to the one above, but the 'Actions' dropdown menu for the first row ('Devices') is highlighted, indicating that row-specific actions are available. The table structure and data remain the same.

4.3.3 Visible columns

Lists that may have plenty of columns have the possibility to adjust them. Please click the “Adjust visible columns” button.

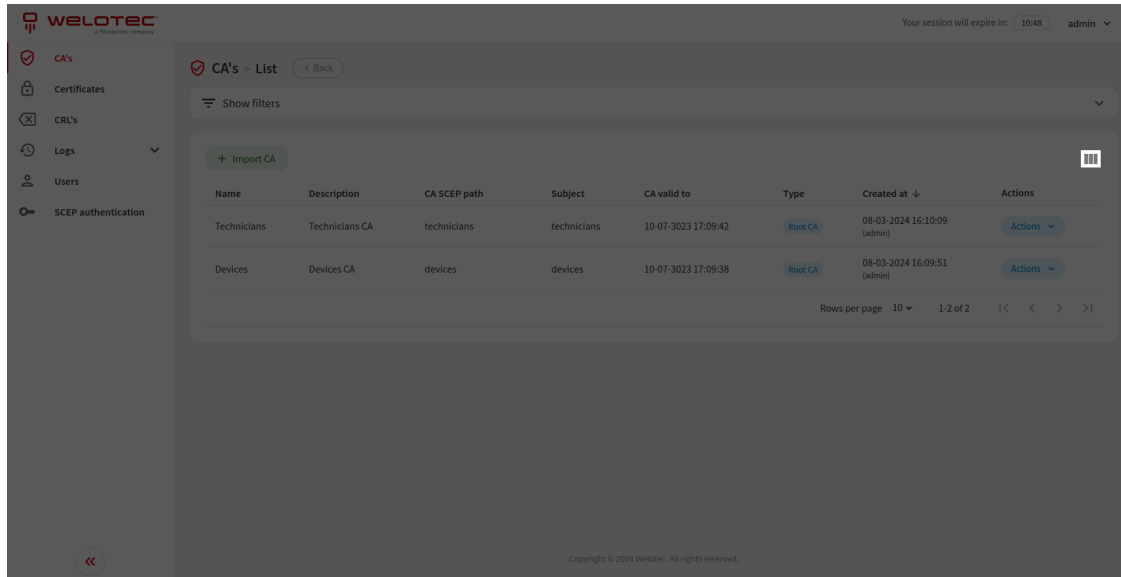


Visible columns dialog will be shown. It will allow you to select visible columns and adjust their order by using the drag & drop technique. Afterward please the changes by clicking the “Confirm” button. You can also reset visible columns to defaults by clicking the “Reset to defaults” button.

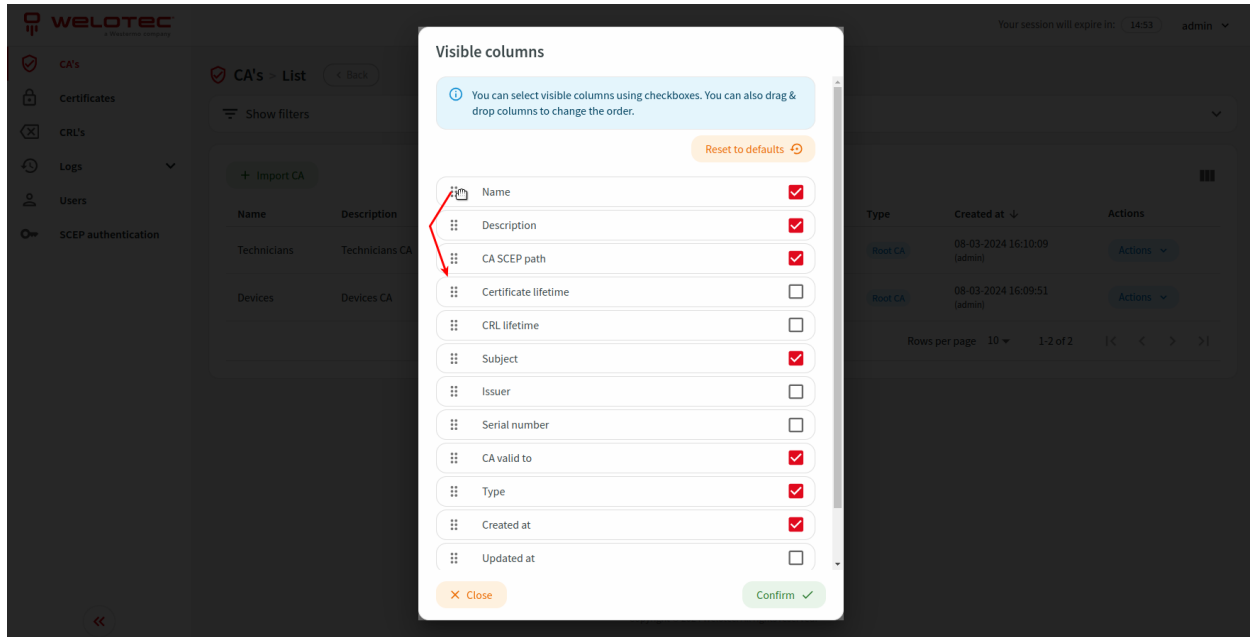


4.3.4 Filtering list results


Visible results on the list can be filtered according to available filters. You can find an expandable “Show filters” section.

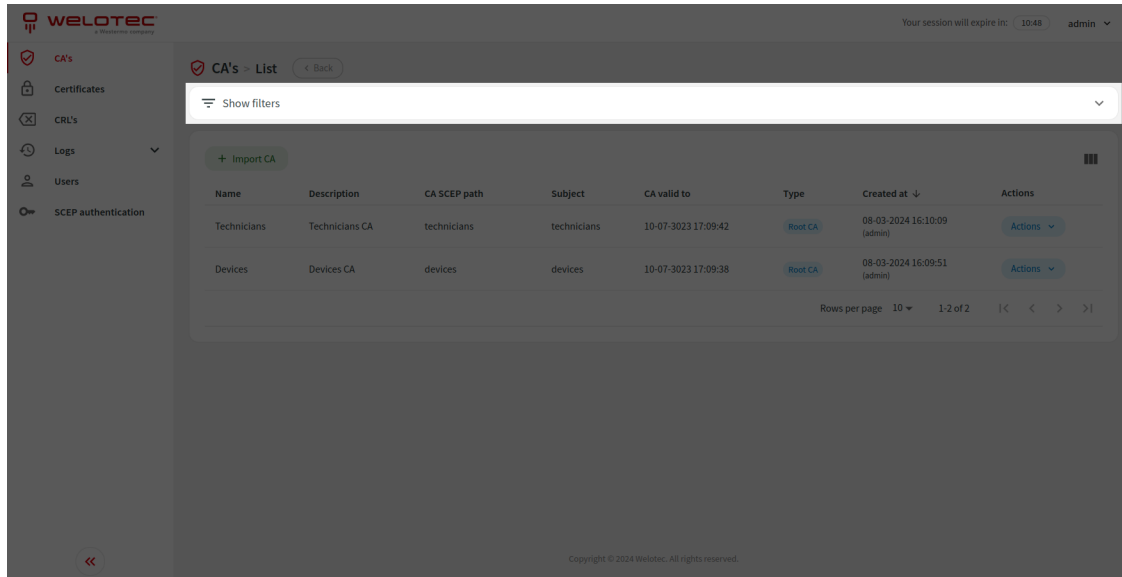

You can use a specific filter by filling in or choosing the proper value in related input and clicking “Submit”. You can also reset all filters by clicking “Clear”.

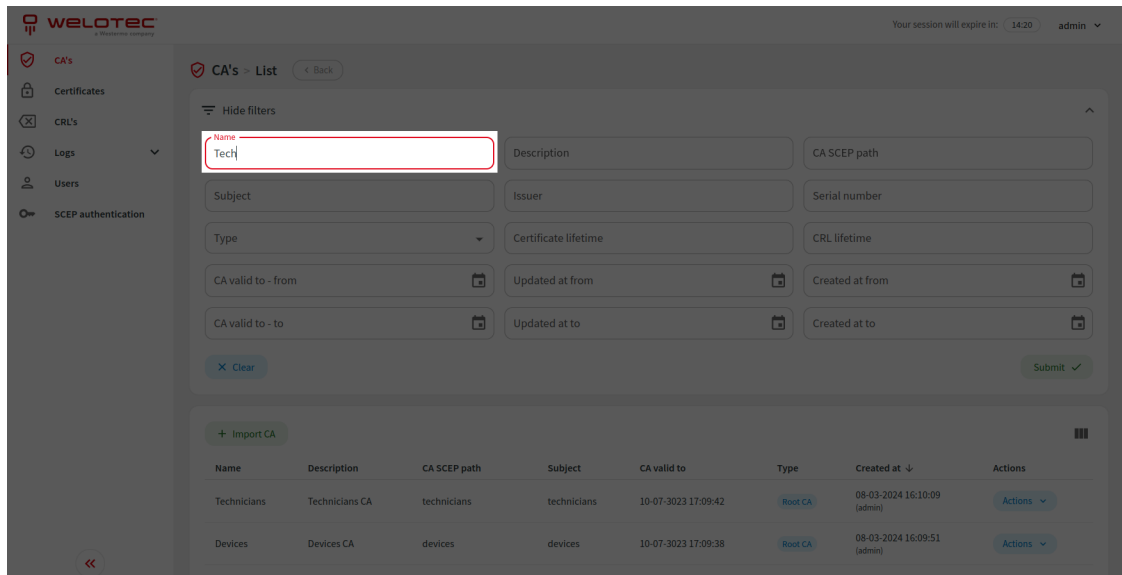


There is an additional indicator (a badge) on the “Show filters” section in case any of the available filters are currently active.

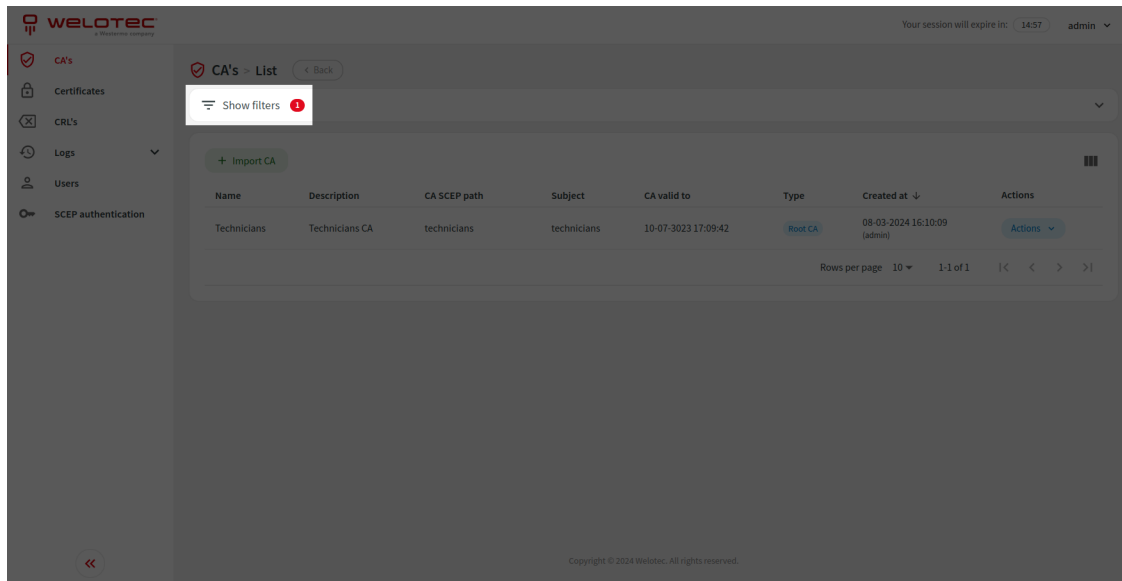


4.3.5 Sorting list results

You can also sort visible results by clicking on the desired column. The second click on the same column will reverse the sorting order.

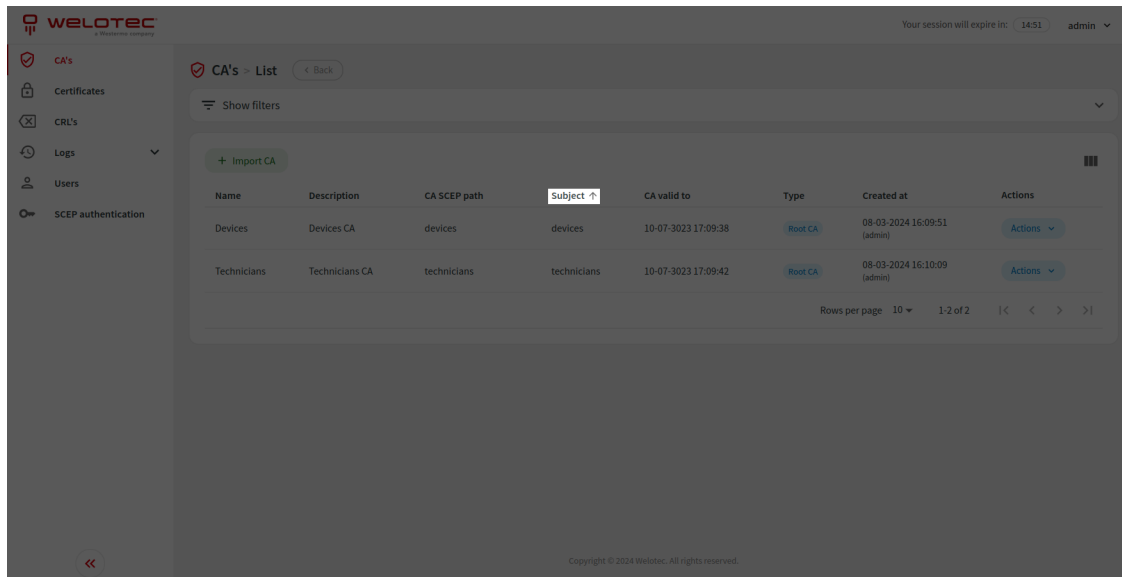

4.3.6 List pagination

Visible results are divided into pages. You can go to a specific page by using the proper button below list results.

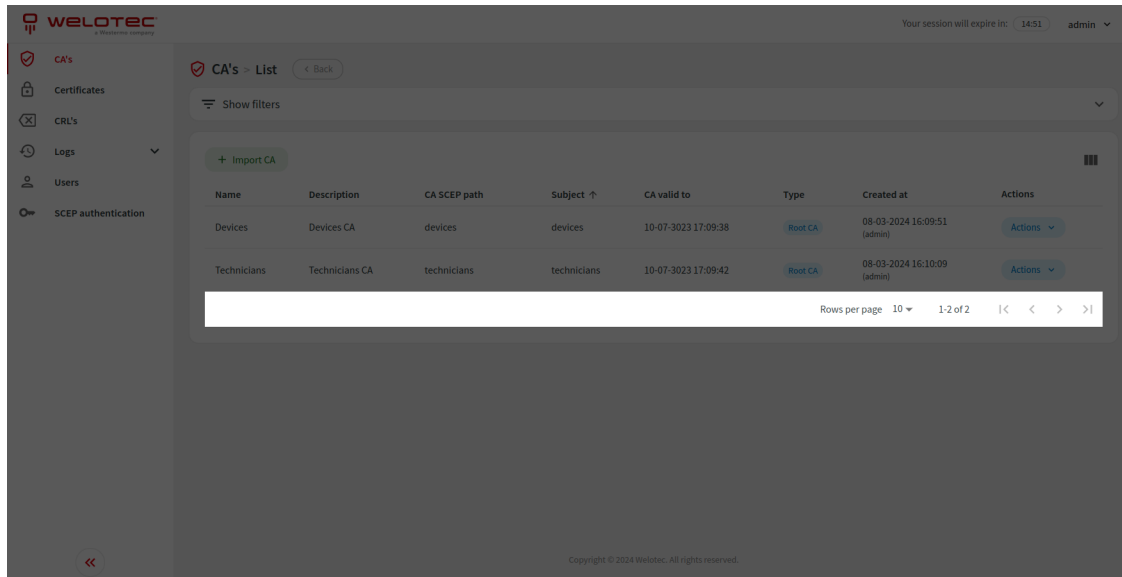


The screenshot shows the 'CA's List' page. It features a table with the following data:

Name	Description	CA SCEP path	Subject ↑	CA valid to	Type	Created at	Actions
Devices	Devices CA	devices	devices	10-07-3023 17:09:38	Root CA	08-03-2024 16:09:51 (admin)	Actions ↓
Technicians	Technicians CA	technicians	technicians	10-07-3023 17:09:42	Root CA	08-03-2024 16:10:09 (admin)	Actions ↓

Below the table, the pagination control shows 'Rows per page: 10' and '1-2 of 2' pages, with navigation arrows for first, previous, next, and last.

4.4 Forms

In order to input or change data you will use forms (i.e. to edit or create a device). Such a form consists of inputs that may need filling. When you edit or create information you can click “Submit” to store or update them in our system.

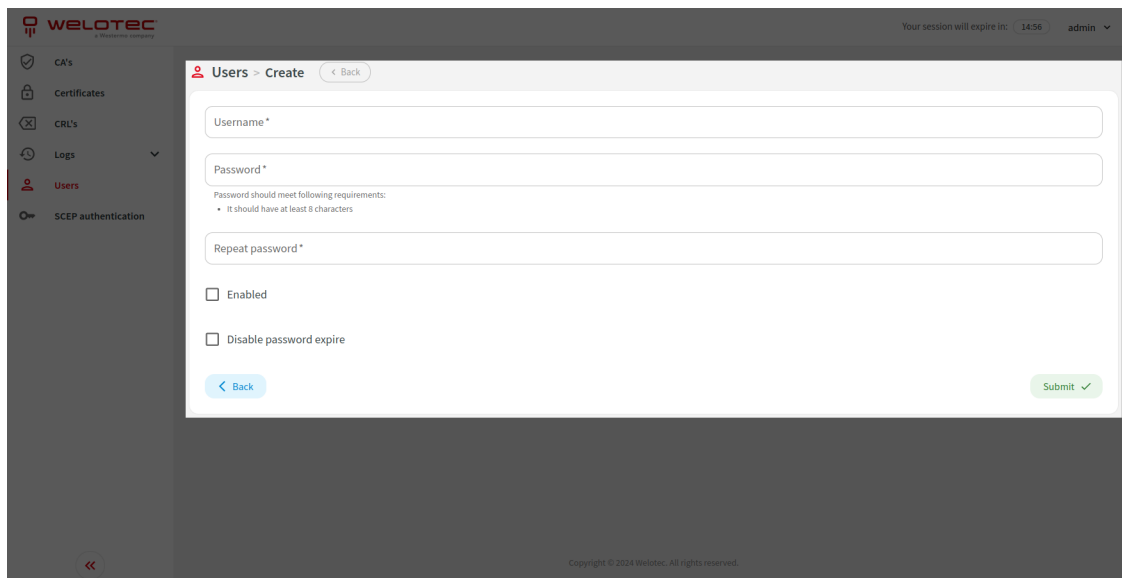

The screenshot shows the 'Users > Create' form. It contains the following fields and options:


- Username *
- Password *
- Repeat password *
- Enabled
- Disable password expire

At the bottom of the form, there are buttons for '< Back' and 'Submit ✓'.

4.5 Dialogs

Modal dialogs appear on top of the content and move the system into a special mode requiring user interaction. This dialog disables the main content until the user explicitly interacts with the modal dialog.

An example use of such dialog is a delete action. In order to perform this action you have to confirm your decision. There are some cases in which deleting some information might lead to additional consequences, you will be informed about them on the delete confirmation screen.

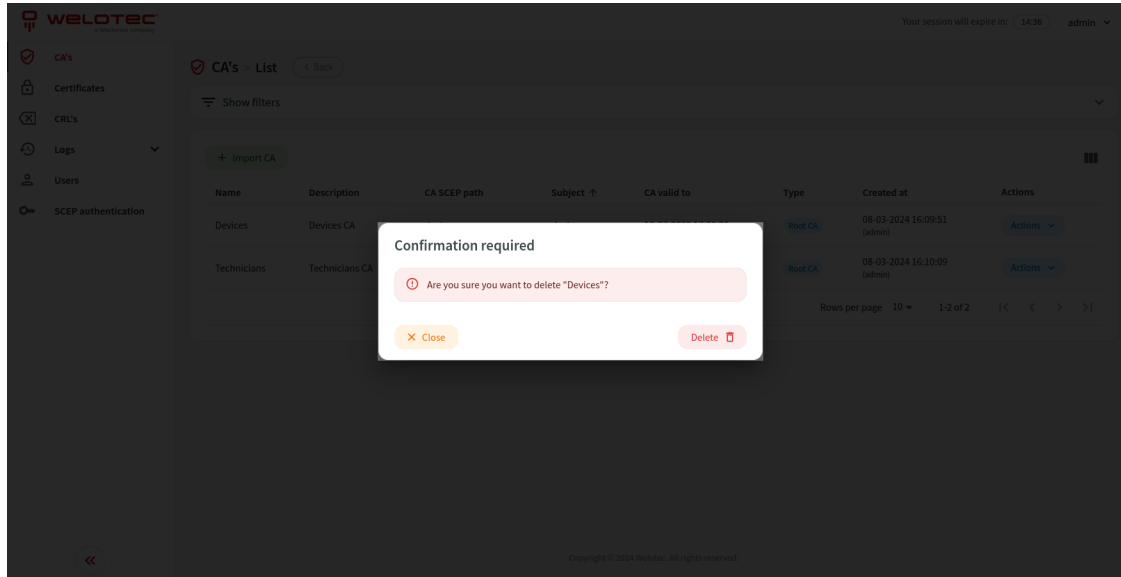

5 Using SCEP Server

5.1 CA's

This section allows you to manage existing certificate authorities. Please be aware that by default only a few selected columns are visible, you can adjust them by using the visible columns functionality.

5.1.1 List actions

You can perform the following extra list actions:

1. Import CA - Redirects to create CA screen

5.1.2 Row actions

You can perform the following extra actions on a single row:

1. Actions - Expandable group of actions.
 1. Edit - Redirects to edit screen for selected CA.
 2. Delete - Opens delete confirmation dialog for selected CA.
 3. CA's certificates - View certificates for the selected CA.
 4. CA's CRL's - View CRL's for the selected CA.
 5. CA's logs - View SCEP logs for the selected CA.
 6. Show CA certificate trust chain - Visible only for CA's with intermediate CA. Open dialog with trust chain for the selected CA.
 7. Show CA certificate - Open dialog with public certificate for the selected CA.
 8. Show CA private key - Open dialog with private key for the selected CA.
 9. Show CRL - Open dialog with CRL for the selected CA.

5.2 Certificates

This section allows you to manage existing certificates. Please be aware that by default only a few selected columns are visible, you can adjust them by using the visible columns functionality.

5.2.1 Row actions

You can perform the following extra actions on a single row:

1. Certificate - Open dialog with contents of the selected certificate.
2. Show CA certificate - Open dialog with CA public certificate of the selected certificate.
3. Revoke - Visible only for signed certificates. Revoke the selected certificate.

5.3 CRL's

This section allows you to manage existing CRL's (Certificate Revocation Lists). Please be aware that by default only a few selected columns are visible, you can adjust them by using the visible columns functionality.

5.3.1 Row actions

You can perform the following extra actions on a single row:

1. Show CRL - Open dialog with contents of the selected CRL.

5.4 Logs

5.4.1 Login attempts

This section allows you to view a list of login attempts.

5.4.2 SCEP logs

This section allows you to view a list of logs . Please be aware that by default only a few selected columns are visible, you can adjust them by using the visible columns functionality.

Row actions

You can perform the following extra actions on a single row:

1. Show content - Open a dialog with the contents of a request that is connected to the selected SCEP log.

5.5 Users

This section allows you to manage existing users.

5.5.1 Row actions

You can perform the following extra actions on a single row:

1. Change password - Allows you to change password for the selected user.
2. Reset secret - Allows you to reset secret for the selected user. Only available when two-factor authentication is enabled in the system.
3. Reset login attempts - Allows you to reset login attempts for the selected user. Only visible when the user exceeded the configured limit for failed login attempts.

5.5.2 Disabled users

Disabled users will not be able to log in to the system. They will be informed that their account is disabled on the login screen.

5.6 SCEP authentication


This section allows you to manage existing SCEP authentication.

5.6.1 Disabled SCEP authentication

Disabled SCEP authentication will not be able to log in to the system. The system will respond with a 401 Unauthorized response status code.

6 Maintenance

You can access the maintenance screen in the navbar menu.

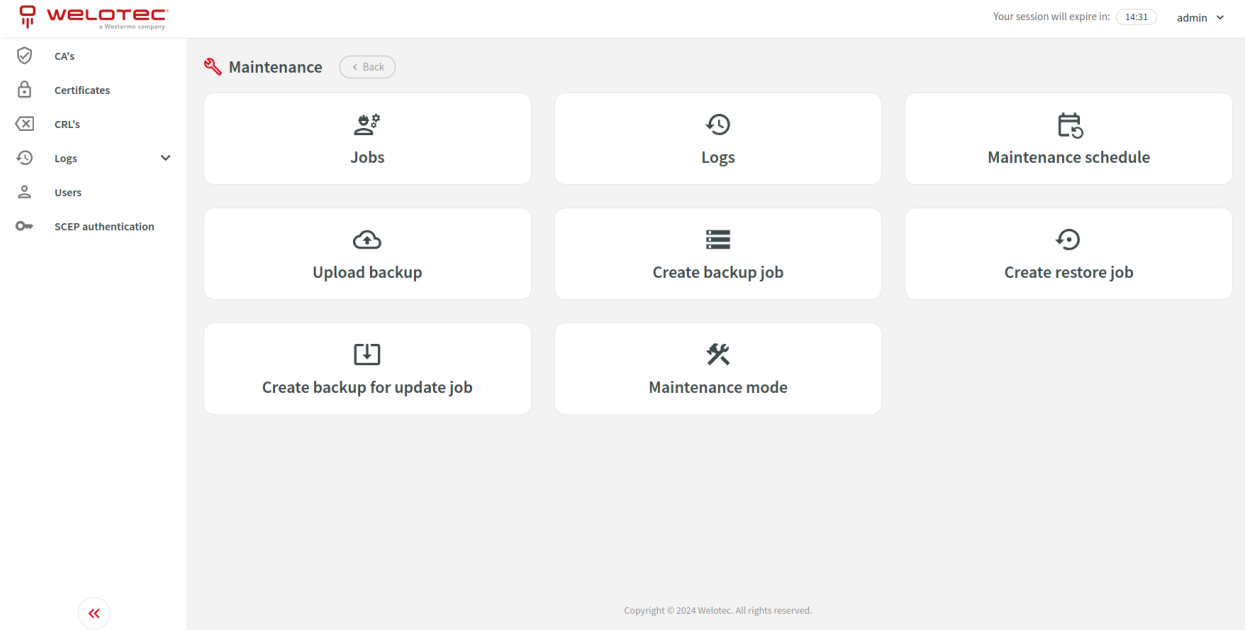

6.1 Jobs

This section allows you to view a list of existing maintenance jobs. Maintenance jobs are executed roughly every minute.

6.1.1 Row actions

You can perform the following extra actions on a single row:

1. Download - Download the backup file. Available only for successful backup maintenance jobs.
2. Logs - View maintenance logs for the selected maintenance job.

6.2 Logs

This section allows you to view a list of existing maintenance logs.

6.3 Maintenance schedules

This section allows you to manage maintenance schedules. Maintenance schedules allow you to define recurring backups.

6.4 Upload backup

This section allows you to upload a backup file. The uploaded backup will be placed in the “backup/” folder located in “/var/www/application/archive” which is by default on the “scepserver-volume-archive” volume.

6.5 Create backup job

This section allows you to create a single backup job. After submitting the form, a backup maintenance job will be created.

6.6 Restore backup job

This section allows you to restore a backup from a file. The list of archives to restore is loaded from “backup/” folder located in “/var/www/application/archive” which is by default on “scepserver-volume-archive” volume. After submitting the form, a restore maintenance job will be created.

Be careful! Restoring a corrupted or invalid version of a backup will cause the application to malfunction.

6.7 Create backup for update job


This section allows you to create a backup for update job. It is recommended to activate maintenance mode before preparing a backup for update. After submitting the form, a backup for update maintenance job will be created.

6.8 Maintenance mode

This section allows you to enable or disable maintenance mode. Enabling maintenance mode will reject device communication and disallow access to the application for every user except administrators.

7 Settings

You can access the settings screen in the navbar menu.

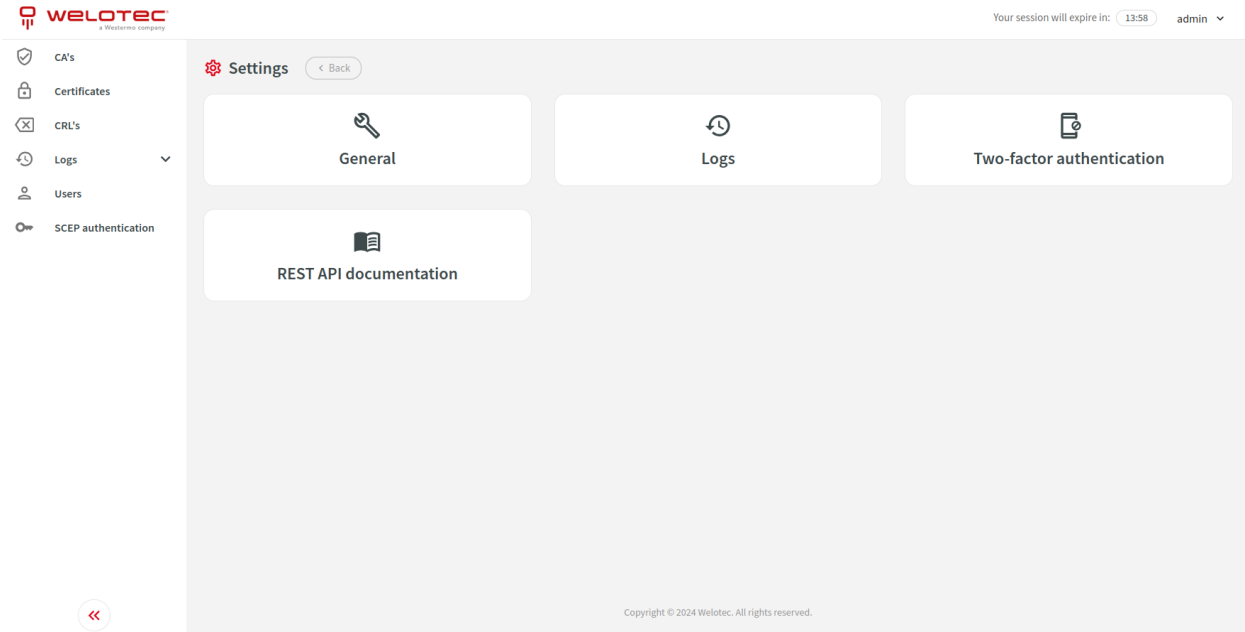

7.1 General

This section allows you to adjust general settings for the system i.e. automatically remove backups, login and password restrictions.

7.2 Logs

This section allows you to adjust settings for cleanup duration and size of different types of logs.

7.3 Two-factor authentication

This section allows you to adjust settings for two-factor authentication (TOTP).

7.4 Single Sign-on (SSO)

This section allows you to adjust settings for single sign-on (SSO).

7.4.1 Microsoft Entra ID with OpenID Connect

You can configure SCEP Server to use OpenID Connect to sign-in users via Azure portal App.

You can find “Application (client) ID” and “Directory (tenant) ID” in your Azure Application under “Overview”. You can read more about “Credential” options below. Please refer to “Roles” section under “Azure Application configuration” and fill “Role mappings”.

After clicking “Submit”, a new button “Log in using Microsoft” will be visible on SCEP Server login screen.

Client secret credential

On your Azure Application please navigate to “Certificates & secrets” (“Manage” section), click “New client secret”, fill the form according to your needs and click “Add”. Value in “Value” of created client secret will be needed to configure SCEP Server.

Uploaded certificate credential

Please upload public and private key. Public key should be uploaded to your Azure Application on “Certificates” tab in “Certificates & secrets” (“Manage” section).

Generated certificate credential

You can generate public and private key by checking “Generate public and private key” and saving the form. You will be able to view or download generated public key afterwards. It should be uploaded to your Azure Application on “Certificates” tab in “Certificates & secrets” (“Manage” section).

Azure Application configuration

Please navigate to “App registrations”, select your application and navigate to “Authentication” (“Manage” section). Please add platform for “Web” and add to “Redirect URIs” your SCEP Server URL followed by /authentication/sso/microsoftoidc/login (i.e. <https://example.com/authentication/sso/microsoftoidc/login>).

Please navigate to “Certificates & secrets” (“Manage” section) and configure it according to selected “Credential” in SCEP Server.

`preferred_username` claim can be used to have human readable username for the user. In order to use it please navigate to “Token configuration” (“Manage” section) and click “Add optional claim”. Select “Token type” ID, check `preferred_username` claim and click “Add” to apply the changes.

In order to support front-channel logout (recommended) please also configure “Front-channel logout URL”. Use your SCEP Server URL followed by /web/api/authentication/sso/microsoftoidc/logout (i.e. <https://example.com/web/api/authentication/sso/microsoftoidc/logout>). You also need to adjust token configuration. Please navigate to “Token configuration” (“Manage” section) and click “Add optional claim”. Select “Token type” ID, check `sid` claim and click “Add” to apply the changes.

Roles

In order to assign roles to specific groups or users please navigate to “App roles” (“Manage” section). Please click “Create app role” and fill the form according to your needs. Please take into consideration that value set in “Value” field is used by SCEP Server to map roles in the application.

In order to map roles in SCEP Server please navigate to “Settings” (click on your username in top right corner) and “Single sign-on (SSO)”. Under “Role mappings” you can set user permissions for each role that has been created in “App roles”.


7.5 REST API documentation

This section allows you to enable or disable REST API documentation for specific users.

8 REST API Documentation

You can access REST API documentation in the navbar menu. This option might be disabled by the Administrator.

This screen allows you to read through REST API documentation described using OpenAPI 3.0 (OAS 3.0) standard and visualised by Swagger UI. You can also download the OpenAPI specification as a YAML file by clicking the “Download as YAML” button in the top right corner.

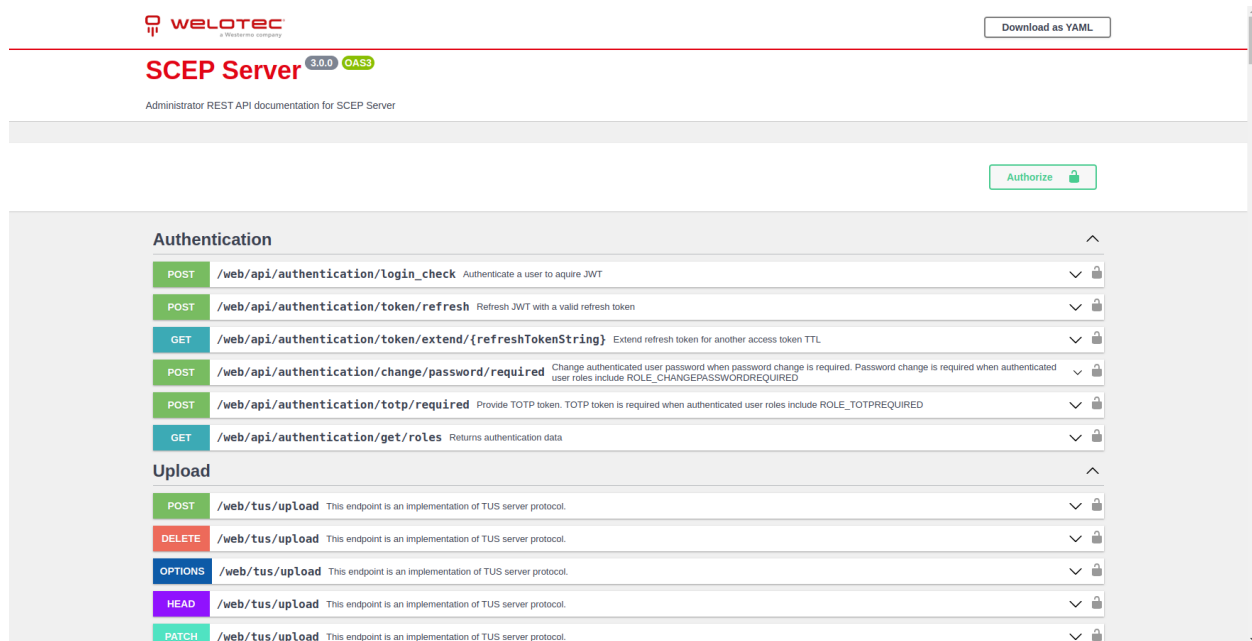

The screenshot displays the Swagger UI for the SCEP Server REST API. At the top, there is a 'Download as YAML' button. Below the header, there is an 'Authorize' button. The main content is divided into two sections: 'Authentication' and 'Upload'.

Authentication


Method	Endpoint	Description
POST	/web/api/authentication/login_check	Authenticate a user to acquire JWT
POST	/web/api/authentication/token/refresh	Refresh JWT with a valid refresh token
GET	/web/api/authentication/token/extend/{refreshTokenString}	Extend refresh token for another access token TTL
POST	/web/api/authentication/change/password/required	Change authenticated user password when password change is required. Password change is required when authenticated user roles include ROLE_CHANGEPASSWORDREQUIRED
POST	/web/api/authentication/otp/required	Provide TOTP token. TOTP token is required when authenticated user roles include ROLE_TOTPREQUIRED
GET	/web/api/authentication/get/roles	Returns authentication data

Upload

Method	Endpoint	Description
POST	/web/tus/upload	This endpoint is an implementation of TUS server protocol.
DELETE	/web/tus/upload	This endpoint is an implementation of TUS server protocol.
OPTIONS	/web/tus/upload	This endpoint is an implementation of TUS server protocol.
HEAD	/web/tus/upload	This endpoint is an implementation of TUS server protocol.
PATCH	/web/tus/upload	This endpoint is an implementation of TUS server protocol.

9 Open source clearance

You can access the open source clearance screen in the navbar menu.

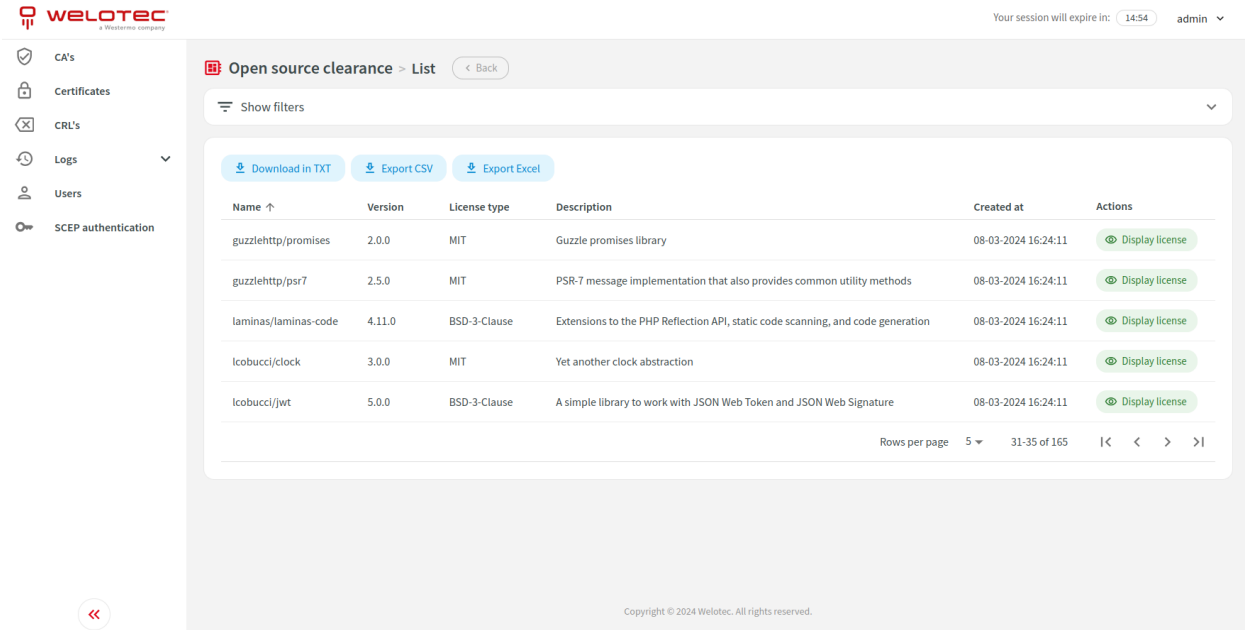

The screenshot shows the 'Open source clearance' list page. The page includes a sidebar with navigation options: CA's, Certificates, CRL's, Logs, Users, and SCEP authentication. The main content area displays a table of open source clearances with columns for Name, Version, License type, Description, Created at, and Actions. Below the table, there are pagination controls showing 'Rows per page' set to 5 and '31-35 of 165' items.

Name ↑	Version	License type	Description	Created at	Actions
guzzlehttp/promises	2.0.0	MIT	Guzzle promises library	08-03-2024 16:24:11	Display license
guzzlehttp/psr7	2.5.0	MIT	PSR-7 message implementation that also provides common utility methods	08-03-2024 16:24:11	Display license
laminas/laminas-code	4.11.0	BSD-3-Clause	Extensions to the PHP Reflection API, static code scanning, and code generation	08-03-2024 16:24:11	Display license
lcobucci/clock	3.0.0	MIT	Yet another clock abstraction	08-03-2024 16:24:11	Display license
lcobucci/jwt	5.0.0	BSD-3-Clause	A simple library to work with JSON Web Token and JSON Web Signature	08-03-2024 16:24:11	Display license

9.1 List actions

You can perform the following extra list actions:

1. Download in TXT - Download open source clearance as a TXT file.

9.2 Row actions

You can perform the following extra actions on a single row:

1. Display license - Open a dialog with the license.

10 Status and license

You can access the status and license screen in the navbar menu.

This screen allows you to see server status, license status, adjust company information, generate license request and upload license.

The screenshot displays the Welotec web interface with a sidebar menu on the left and a main content area on the right. The sidebar menu includes: CA's, Certificates, CRL's, Logs, Users, and SCEP authentication. The main content area is divided into four sections:

- Server status:** A table showing system metrics:


SCEP Server version	development
System-Time	15:24:57 08-03-2024
CPU-Load	22%
RAM-Load	31% (9.57 GB / 31.16 GB)
Filesystem	95% (216.75 GB / 227.66 GB)
Database size	0.66 MB
- Company info:** A form with fields for Company name (Example company), Contact person (John Doe), and Contact e-mail (john.doe@example.com). A "Submit" button is at the bottom right.
- License info:** A table showing license details:

Issued to	Example company
Issue date	08-03-2024
Expire date	Unlimited
Max amount of certificate authorities	Unlimited
Max amount of users	Unlimited
Max amount of SCEP authentications	Unlimited
Branding functionalities	Yes
- License request:** A section with a blue callout box: "Please click button below to generate license request. You will be able to copy generated license request to a clipboard or download it to a file." Below the callout is a "Generate license request" button.
- Upload license:** A section with a "License content" text area and an "Upload license" button.


At the bottom of the interface, there is a copyright notice: "Copyright © 2024 Welotec. All rights reserved." and a session timer: "Your session will expire in: 14:56 admin".

10.1 Requesting license

You can request a license by clicking “Generate license request”.

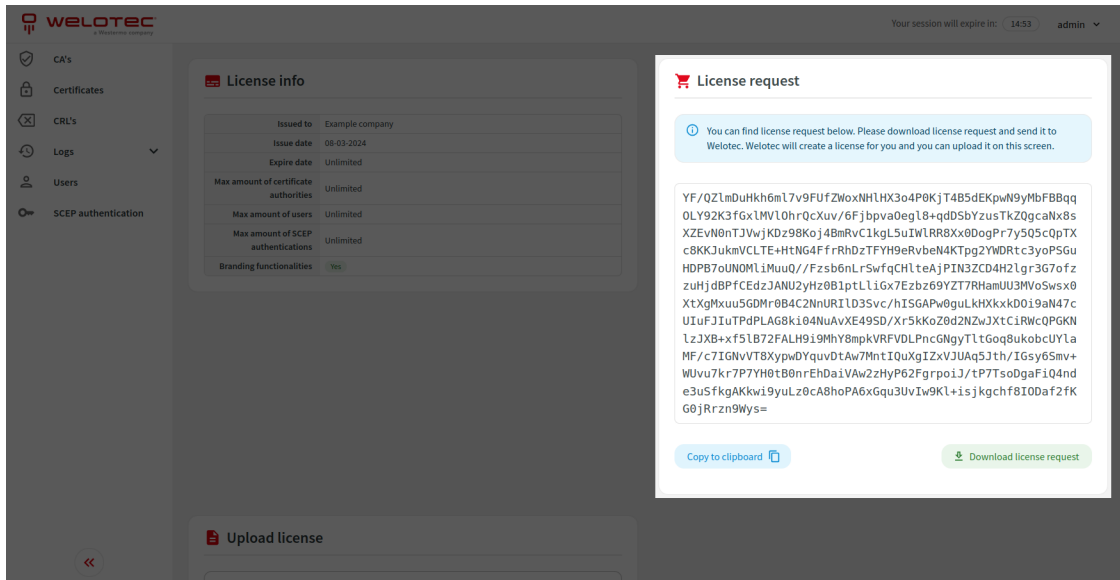

License request will be shown. You can copy it to a clipboard or download it to a file. Please send generated license request to Welotec so we can generate an appropriate license for you. The generated license should be uploaded to the system using the “Upload license” form.

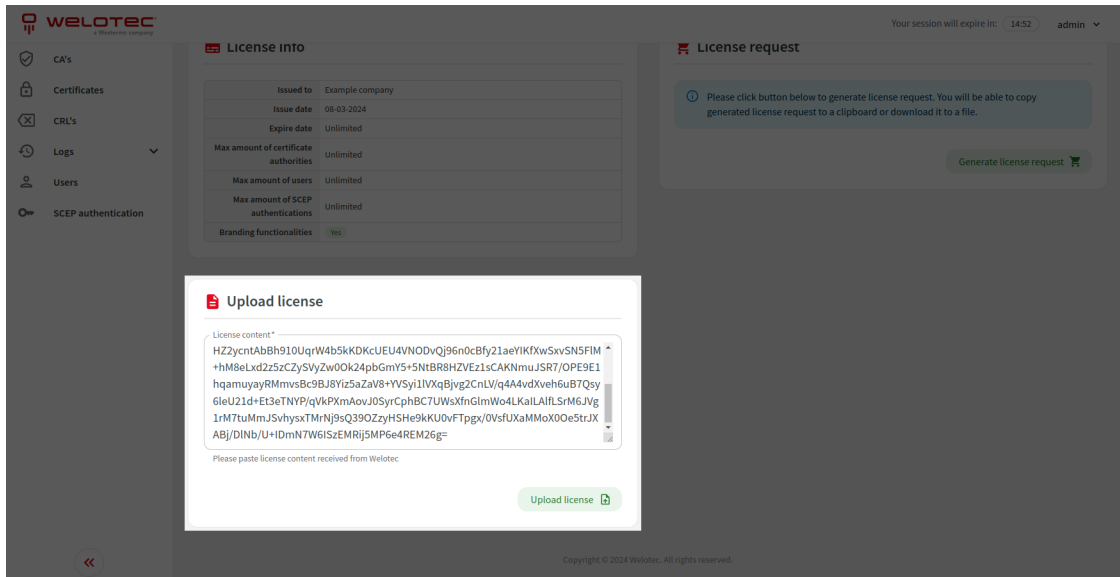

10.2 License expiration

In case of license expiry, the system will switch back to the demo license. When the demo license expires, the system will run in maintenance mode.

11 OSS clearings

You can find OSS clearings under following link: [OSS Licenses](#)